Technical specification

Ventilation mode

IPPV, A/C, PCV, SIMV, SPONT/CPAP, PSV,SIGH,MANUAL

Ventilator parameter

Tidal volume (Vt)	0 ~ 2000 mL
Frequency (Freq)	1 min ~ 100 min
Oxygen concentration	21 % ~ 100 %
I:E	4:1~1:8
PEEP	$0 \text{cmH}_2\text{O} \sim 40 \text{ cmH}_2\text{O}$
Pressure triggering sensitivity (Ptr)	-20 cmH ₂ O ~ 20 cmH ₂ O (Based on PEEP)
Flow trigger sensitivity (Ftr)	0.5 L/min ~ 30 L/min
Pressure control (PC)	$5 \text{ cmH}_2\text{O} \sim 80 \text{ cmH}_2\text{O}$
Pressure support (PS)	$0 \text{ cmH}_2\text{O} \sim 80 \text{ cmH}_2\text{O}$
SIGH	0 (off) 1/100 ~ 5/100
Apnea ventilation	OFF, 5 s ~ 60 s
Pressure limit	20 cmH ₂ O ~ 100 cmH ₂ O

Monitoring parameter

Frequency (Freq)	0 / min ~ 100 / min
Tidal volume(Vt)	0 mL ~ 2500 mL
MV	0 L/min ~ 99 L/min
Airway pressure	$0 \text{ cmH}_2\text{O} \sim 100 \text{ cmH}_2\text{O}$
Dynamic lung compliance testing	$1 \text{ mL/cmH}_2\text{O} \sim 1000 \text{ mL/cmH}_2\text{O}$
ETCO ₂ concentration	0 mm Hg ~ 152 mmHg (0 % ~ 20 %)
Oxygen concentration	15 % ~ 100 %

Packing size

Main engine: L 560 * W 560 * H 605 mm
G.W. : 40 KG, N.W. : 22 KG
Air compressor: L 683* W 687 * H 1140 mm
G.W. : 105 KG, N.W. : 70 KG

Other models for your reference:



Alarm and protection

AC power failure alarm	Power failure or no connection	
Internal backup battery low voltage alarm ≤ 11.3 ± 0.3 V		
No tidal volume	No tidal volume within 6 s	
High minute volume alarm	5 L/min ~ 99 L/min	
Low minute volume alarm	1 L/min ~ 30 L/min	
High airway pressure alarm	20 cmH ₂ O ~ 100 cmH ₂ O	
Low airway pressure alarm	0 cmH ₂ O ~ 20 cmH ₂ O	
High oxygen concentration alarm	19 % ~ 100 %	
Low oxygen concentration alarm	18 % ~ 99 %	
Continuous pressure alarm	(PEEP + 1.5 cmH ₂ O) over 16 s	
Suffocation warning	5~60 s	
Fan error	Show on screen	
Oxygen deficit	Show on screen	
The maximum limited pressure	< 12.5 kPa	

Working condition


Gas source	O ₂ , Air
Pressure	280 kPa - 600 kPa
Voltage	220 V ± 22 V
Power frequency	50 Hz ± 1 Hz
Input power	900 VA (With air compressor)
	250 VA (Without air compressor)

Oscillogram

P-T(Pressure-Time)
F-T(Flow-Time)
V-T(Volume-Time)
ETCO ₂ -T (End-Tidal CO ₂ -Time)
P-V Loop(Pressure-Volume Loop)
F-V Loop(Flow-Volume Loop)
P-F Loop(Pressure-Flow Loop)





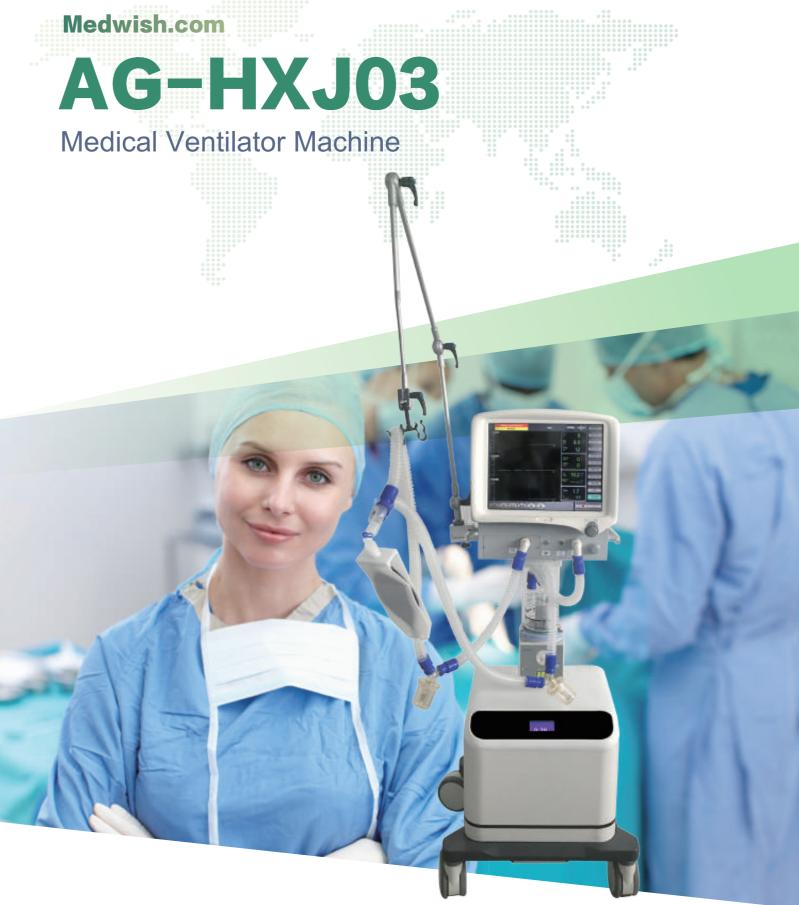

Make medical care easier



ICU Ventilator

Application

The ventilator makes a good performance in operation room,ICU department and emergency treatment.It used to assist or replace the spontaneous breathing for adult pediatric and neonatal more than 2kg. 25 years experience in Market-oriented ventilator make us professional and reliable, satisfying all your needs in ventilation. Due to the flexible configuration, good quality and competitive price, The ventilator has soon become the superstar of market.

Features

- 15" TFT touch screen displays the ventilation parameters, alarm information, and oscillograms, make every operation more easily.
- Multiple ventilation modes, suitable for ICU, emergency department and operation room etc: (IPPV, A/C, PCV, SIMV, PSV, SPONT/CPAP, SIGH, MANUAL)
- 5 oscillograms for your choice, 3 of them can be displayed on the screen at the same time.
- ETCO₂ is standard configuration for this machine.
- Humidifier can heat and wet breathing gas, makes it comfortable for patient to breathe.
- Rapid oxygen supply, automatically offer high flow rate oxygen within two minutes
- Nebulization make medicine into small liquid and particle, easier and quickier for patient to breathe in.
- High temperature resistance breathing circuit is reusable and anti-pollution.

Safety

- 14 types of sound and visual alarm information, easier for users to do some error checking and troubleshooting.
- Built-in oxygen concentration sensor, ensure stable precision of oxygen concentration.
- Easy to move with four casters, easy to stop with two brakes.
- Separate design of electronic circuit and gas flow rate keep safe running of ventilator.
- Compact long life internal battery can provide emergency power, avoid risk of patient.
- Self-check before operation, eliminate system mistake.

14 types of alarm and protection function

3 of 5 oscillographs can be displayed on the screen at the same time

Parameters settin

Oxygen concentration sensor

00008

otal working tim

Display continuous working

hours for the air compressor

Make medical care easier



Medwish.com



Medwish.com, owned by Jiangsu Medwish Network Technology Co., Ltd, is one of the largest global B2B marketplaces for medical equipment, financing, and new hospital project services.

Why Choose Us

Professional:

13 years' import & export experience in the medical field, exported to more than 100 countries, serving more than 1500 hospitals/clinics

Efficient:

Professional sales and partners, you can reach us at anytime.

Reliable: \bigcirc

You can find us on Alibaba, Medicalexpo, Google, Facebook, YouTube, LinkedIn, and local references anywhere.

- Flexible: Payment by TT, LC, or financing service. Both order financing and project financing are available. You' re able to apply online.
- Economical: (\$) We cut off all the intermediate processes by saving 30-60% of the total production cost for your hospital projects.



Transparent:

Raw materials, certificates, and warranty are clearly mentioned.



Make medical care easier

One-stop solution, strong supply chain. 14 full product categories cover the whole medical industry chain.

Jiangsu Medwish Network Technology Co., Ltd ADD:Aoyang International Building,Zhangjiagang, Jiangsu,215600,China Tel: 0086 138 1298 8917 Fax: 0086-512-58170725